
Technical Specification Sheet



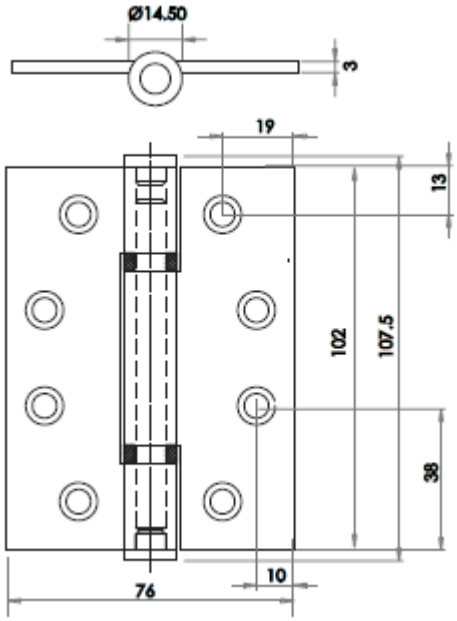

Code J9603

Finishes **SSS/PSS/ PVD SB,DB,AB,BL**

Product specification

- BS EN 1935 : 2002
- Tested to 200,000 cycles
- Grade 13, Certifire C547
- BS EN 1634-1 FD30/60
- Corrosion grade 4 240hrs
- **Fire Assessment Report Evidence**: WF 375207 Issue 3
- Mechanical evidence WIL 398371-2
- Endurance test 120Kg
- Low maintenance
- FD30, All hinges must be bedded onto 1mm thickness of mono ammonium phosphate or graphite based intumescent sheet material behind both blades
- FD60, All hinges must be bedded onto 2mm thickness of mono ammonium phosphate or graphite based intumescent sheet material behind both blades
- 202g
- Interior use recommended

For more information please contact us today:
Call: 020 8648 1500
Fax: 020 8648 1626
Email: sales@frelan.co.uk
Web: www.frelan.co.uk
Frelan Hardware Ltd, Unit 10 Mitcham Industrial Estate
Streatham Road, Mitcham, Surrey CR4 2AP